


Body Dimensions

Engine room

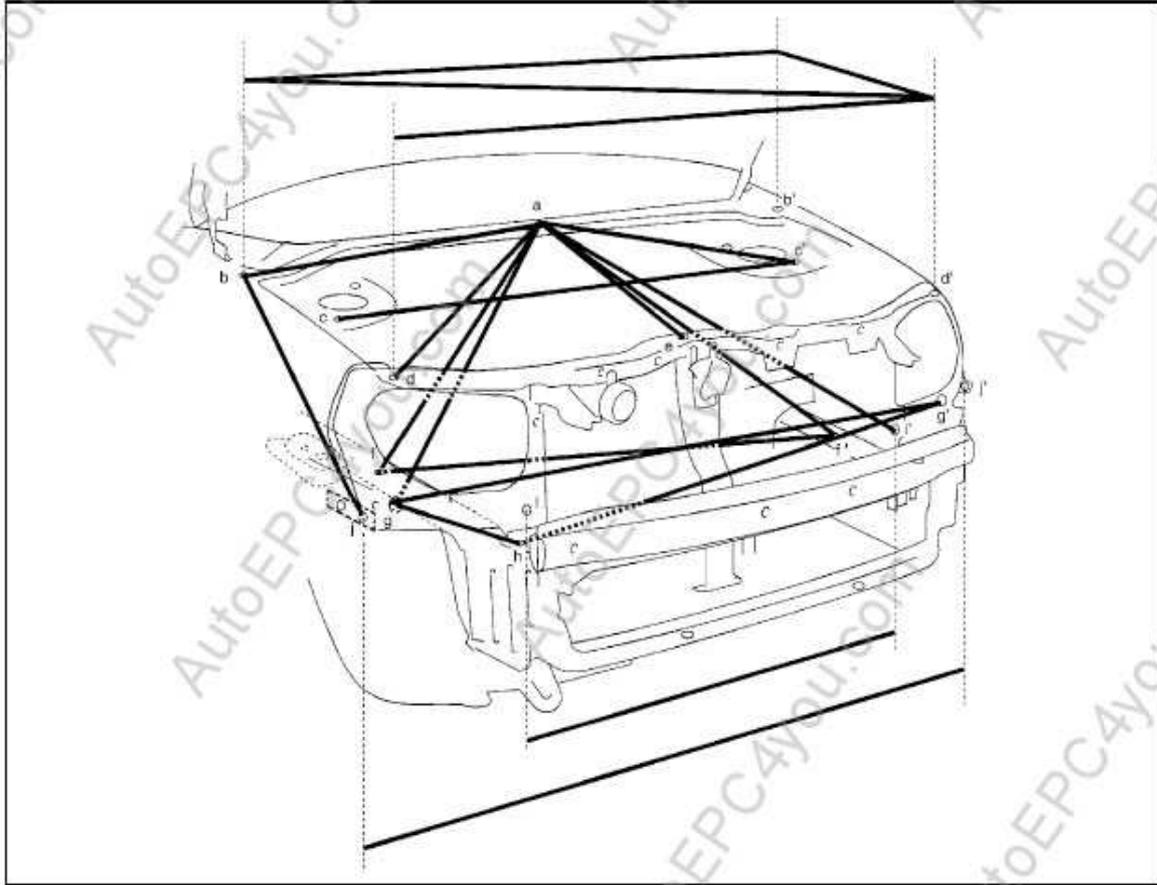

a. Garnish installation center hole (ø5)	e. Hood cushion installation hole	i (i'). Head light installation hole
b (b'). Front fender installation hole	i (i'). Engine mounting installation front hole	j (j'). Front fender installation hole
c (c'). Strut installation front hole	g (g'). Jig hole (ø15 mm)	
d (d'). Front fender installation hole	h. Bumper member upper side installation hole.	

Hole to hole distance

a-b: 673 mm (26.50 in.)	a-i': 799 mm (31.46 in.)	f-f': 952 mm (37.48 in.)
a-c': 583 mm (22.95 in.)	b-b': 1340 mm (52.76 in.)	g-g': 1315 mm (51.77 in.)
a-d: 760 mm (29.92 in.)	b-d': 1393 mm (58.84 in.)	g-h: 230 mm (9.06 in.)
a-e: 599 mm (23.58 in.)	b-j: 671 mm (26.42 in.)	g'-h: 1139 mm (44.84 in.)
a-f: 774 mm (30.47 in.)	b'-d': 401 mm (15.79 in.)	i-i': 922 mm (36.30 in.)
a-f': 802 mm (31.57 in.)	c-c': 1098 mm (43.23 in.)	j-j': 1343 mm (52.87 in.)
a-g: 890 mm (35.04 in.)	d-d': 1328 mm (52.28 in.)	